

CPS-30

Central Pay Station

Credit Card Only

The CPS-30's modular design and intelligent engineering make it the industry's most reliable ticket receiving/payment device. This user friendly device processes unpaid tickets and accommodates monthly cardholder payments with a TFT display and intercom for communication with patrons. TIBA's logical design allows for the addition of smartcard readers and/or pin-pad for a reasonable cost.


TIBA's engineers succeeded to create a simple and reliable design. The unit consists of an off-the-shelf receipt printing/ticket scanning/transport device, power supply, main board, I/O board and display. When changing receipt paper the interior of the unit conveniently slides out for easy access. Additionally all TIBA products have on-board communications isolators.

Standard:

- Lost ticket button
- Event pre-pay capability
- Backlit TFT display
- Motorized Barcode reader to scan and process tickets
- Magnetic Card reader to accept credit cards
- Receipt printer
- Communications line surge protector
- Stainless steel construction.

Optional:

- Analog, digital or VOIP intercom
- Value card payments
- Monthly card holder payments

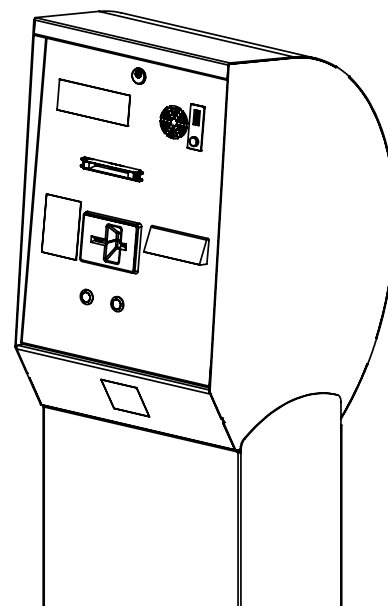




ATLANTA, GEORGIA U.S.A.

5126 South Royal Atlanta Drive
Tucker, Georgia 30084
U.S.A.

770.491.7586 Phone
770.934.3384 Fax
www.tibaparking.com

CPS-30

Central Pay Station

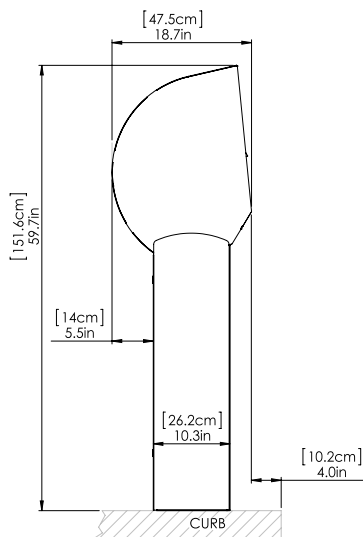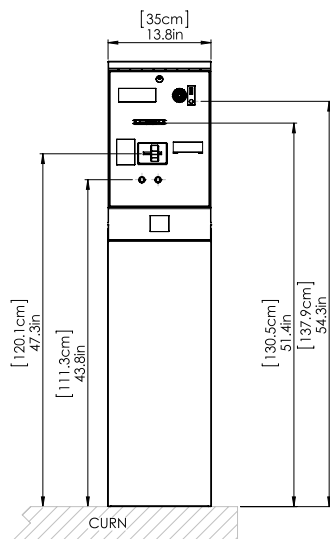

Features

Ticket verifier	Motorized barcode scanner
Monthlies/Employees	Access payments via proximity card
Credit Card Reader	Standard
Receipt Printer	Standard
Value Card Holders	Optional: analog, digital or VOIP intercom
Customer Display	Standard: TFT display
Intercom	Optional: digital or VOIP intercom
Surge Protection	Built in

Operation

Processor	Embedded industrial controller
Communication & Network	RS-485 industrial communication or TCP/IP ethernet communication
Clock	Built in; backed up by lithium ion battery; keeps clock and data for up to 10 years
Monitoring	Transaction and all events monitored on-line
Off-Line Operation	Full off-line mode enabled

Housing – Stainless Steel

Measurements	14" (35.6 cm) Width; 18.7" (47.5 cm) Depth 59.7" (151.6 cm) Height
Weight	127 lbs. (57 kg)
Color (Housing)	Standard: White RAL 9010 Optional: Custom colors available

Electrical

Voltage	100-240V AC, 50-60 HZ
Current	1A, 5.3A with heater
Power Consumption	240W, 640W with heater
Operating Voltage	24V

Environment Conditions

Operating Temperature	-4° to 122° F (-20° to 50° C) with heater
IP Rating	54

Regulatory



Safety	• UL 60950-1:2007 • CAN/CSA-C22.2 No. 60950-1-07
EMC	• FCC Part 15, Subpart B, Class B • CE EMC



Subject to design and functionality changes until product shipping.